


## Model Selection

Model	Description H x W x D (in)	Airflow cfm (L/s)					Effectiveness @ 0 °C (32 °F)	Performance Highlights
		.1 (25 Pa)	.2 (50 Pa)	.3 (75 Pa)	.4 (100 Pa)	.5 (125 Pa)		
<b>95 MAX</b>	Recirculating Defrost 24.5 x 18.5 x 16	76 (36)	73 (34)	70 (33)	66 (31)	60 (29)	88%	Compact design for tight installations. Three top ports and 4th port knockout allows top or side mounting.
<b>155 MAX</b> <b>155 MAX RX</b>	Recirculating Defrost 19 x 33.62 x 14.75	150 (71)	146 (69)	134 (63)	121 (57)	106 (50)	76%	Most popular HRV. Horizontal w/ door port balance. Same as 155 MAX, reverse design.
<b>155 ECM</b>	Recirculating Defrost 19 x 33.62 x 14.75	164 (77)	157 (74)	147 (69)	146 (69)	140 (66)	72%	Same design as 155 MAX, with a highly efficient energy-saving ECM motor.
<b>200 MAX</b> <b>200 MAX RX</b>	Recirculating Defrost 19 x 33.62 x 14.75	207 (97)	200 (94)	184 (87)	171 (80)	152 (71)	74%	Versatile performance in a variety of regions. Same as 200 MAX, reverse design.
<b>MAXTOP</b>	Recirculating Defrost 25.5 x 22.5 x 26.5	196 (93)	188 (89)	178 (84)	165 (78)	149 (70)	80%	Ports at 45° for easy top or horizontal mounting. Makes installation possible in tighter spaces.
<b>195 DCS</b>	Damper Defrost 19 x 49 x 14.75	203 (96)	191 (90)	182 (86)	167 (79)	155 (73)	88%	Dual core for max heat recovery & energy efficiency. Also available with an ECM motor.
<b>300 DCS</b>	Damper Defrost 19 x 49 x 14.75	265 (125)	260 (123)	250 (118)	235 (111)	220 (104)	90%	Same design as 195 DCS except for greater airflows. Meets the needs of high-efficiency in larger homes.
<b>200 ERV</b> <b>200 ERVD</b>	No Defrost Damper Defrost 19 x 33.62 x 14.75 (both)	180 (85)	169 (79)	157 (74)	146 (68)	132 (62)	76%	For warm, humid regions with temperatures above -4 °C Same design as 200 ERV with damper and 5 ports.



Setting a new standard  
for energy efficient, clean air homes

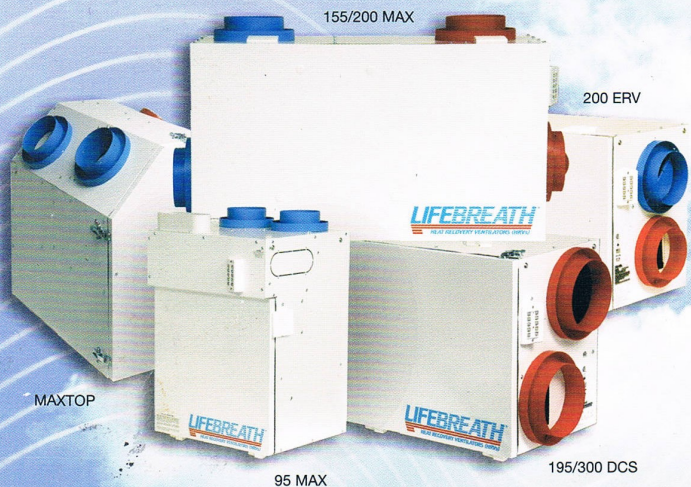


Visit us at [www.lifebreath.com](http://www.lifebreath.com)

Manufacturer reserves the right to change specifications without notice.

## Control Options



Lifestyle MAX  
Digital Control  
#99-DXPL01  
(included)



or choose...  
Lifestyle MAX  
Programmable  
Control  
#99-LS01

- 5-speed operation
  - 4 user operational modes
    - continuous ventilation
    - 20 min. ON, 40 min. OFF
    - 20 min. ON, 40 min. recirculation\*
    - continuous recirculation\*
- \*Not available on all models

- **DELUXE** fully featured 5-speed, 4 mode unit.
- Fully **PROGRAMMABLE**, allowing you to customize for your specific lifestyle.

- Built-in interface to furnace
- Automatic service reminder
- Automatic control based on outdoor temperature sensing.

## Timers

Lifestyle 20/40/60 Minute Timer #99-DET01

- Initiate high speed operation for 20, 40 or 60 min.

Lifestyle 20 Minute Timer #99-20M01

- Initiates high speed operation for 20 min.

