

PRESTIGE™ HIGH-EFFICIENCY CONDENSING TANKLESS FROM RHEEM

# CONDENSING

*The Next Level of Tankless!*




**Tankless** water heaters  
Continuous hot water



*relax*  
It's Rheem®

# PRESTIGE™ HIGH-EFFICIENCY CONDENSING TANKLESS FROM RHEEM

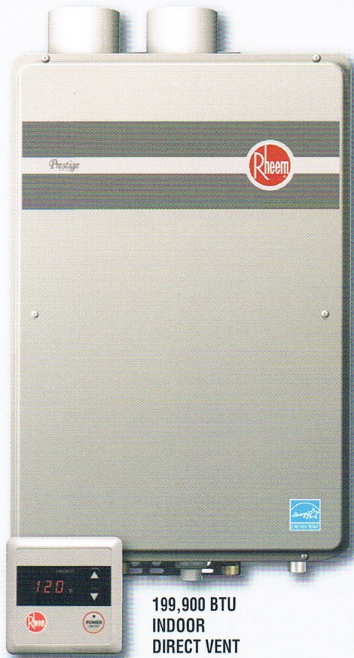

**.94**  
Energy Factor!  
For 3  
Bathroom Homes

**CRTGH-95DV indoor direct vent natural and LP models – 11,000 - 199,900 BTU max.**  
9.5 gal./min at 35° F rise max.,  
8.4 gal./min. at 45° F rise

**Limited Warranty**  
**12-Year on heat exchanger,**  
**5-Year on parts, 1-Year on labor\***

\* See Residential Warranty Certificate for complete warranty information.

- ULC-S636 PVC/CPVC venting
- 94% efficient
- Third-party efficiency certified by AHRI
- **Industry Best!** .26 GPM Minimum Flow Rate, .40 GPM Minimum Activation Flow Rate
- **New!** Next generation burner technology
- Meet **ENERGY STAR®** requirements
- Condensate Neutralizer
- Remote control is included and can be set from the out-of-the-box 120 degrees – up to a 140 degree maximum
- EZ-Link™ cable connects two tankless units to operate as one – now available for high demand applications

- **Exclusive!** Guardian™ overheat film wrap (OFW)
- **Exclusive!** High-altitude capability options – up to 9,840 ft. elevation above sea level
- **New!** Manifold up to 6 units with an optional MIC-6 manifold control board
- **Exclusive!** Link up to 20 Rheem units for manifold installations by using the optional MIC-180 and MICS-180 manifold control assembly
- Intelligent electronic controls designed to increase energy efficiency and safety
- Digital display shows temperature setting and maintenance codes
- Indoor models supplied with a 120 volt power cord



## Specifications

DESCRIPTION			FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						ENERGY INFO.		
MODEL NUMBER	GAS INPUT BTU/HR.	TYPE	TEMP. RANGE	WATER FLOW RATE			CONNECTION WATER	GAS	HEIGHT	WIDTH	DEPTH	VENT DIAMETER (INCHES)	SHIP. WEIGHT (LBS.)	ENERGY FACTOR	OPERATING COST NAT.
				GPM @ 77° RISE MAX.	GPM @ 45° RISE MAX.	GPM @ 35° RISE MAX.									
<b>RHEEM PRESTIGE™ HIGH-EFFICIENCY CONDENSING TANKLESS WATER HEATERS FOR 3 BATHROOM HOMES</b>															
CRTGH-95DVN	11,000 - 199,900	Indoor Direct Vent	85° to 140°	4.9	8.4	9.5	1/2 or 3/4	3/4	27-1/2	18-1/2	9-3/4	2"/3"	82	.94	\$194


All models are available in Natural Gas and Propane (LP). For Propane replace the N with P when ordering.

- Factory set temperature is 120° F for all models. See Use and Care Manual for setting.
  - For installations above 3,280 feet, adjustment is required. Refer to Rheem price list or consult factory for details.
  - Consult factory for information on sizing the application.
- Installation Vent Kits available, sold separately.

## Maximum Hot Water Flow Rate and Temperature Rise


Model Number	35°	45°	50°	60°	70°	77°	80°	90°	100°
CRTGH-95 Water Flow (GPM)	9.5	8.4	7.6	6.3	5.4	4.9	4.7	4.2	3.8

Above estimates are for sizing purposes only.

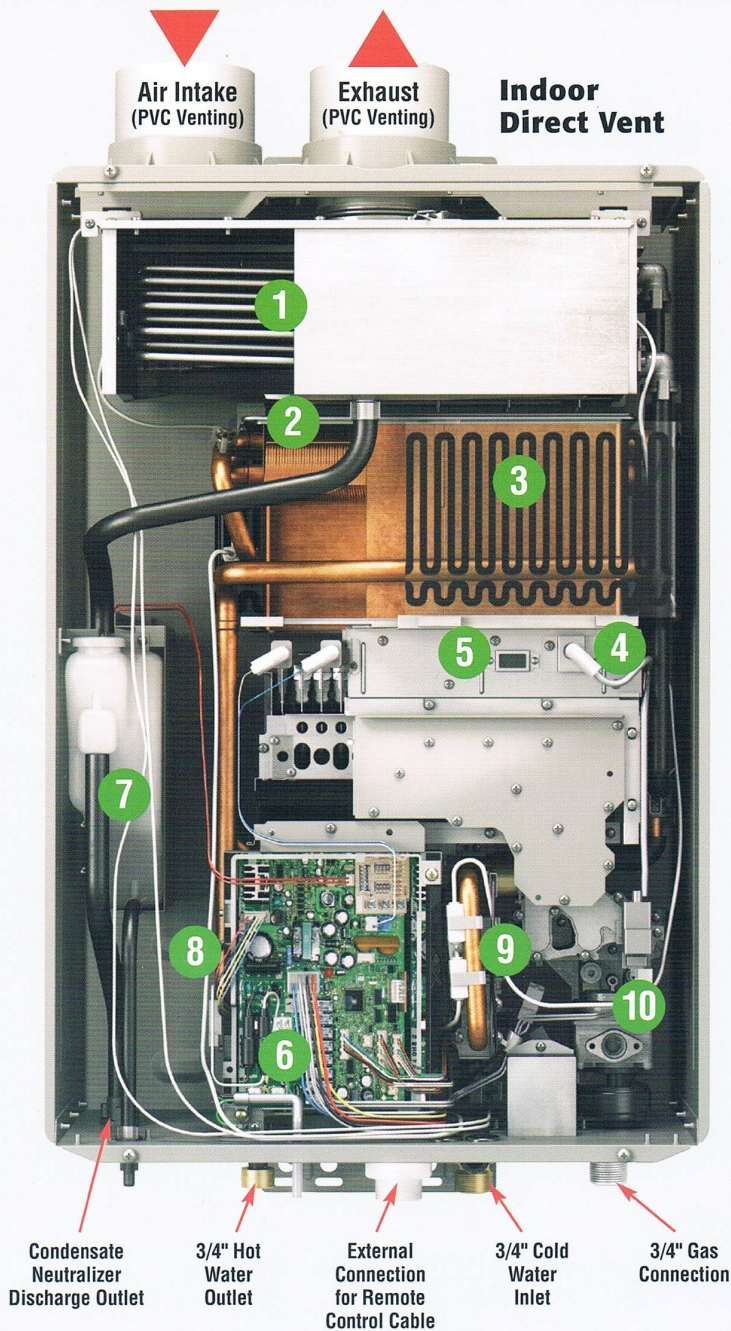

- 1 Stainless Steel Secondary Heat Exchanger
- 2 All-Copper Primary Heat Exchanger
- 3 Over Heat Film Wrap
- 4 Electronic Spark Ignition
- 5 199,900 BTU Modulating Burner
- 6 Electronic Control Board
- 7 Condensate Reservoir
- 8 Variable Speed Fan
- 9 Water Flow Control System
- 10 Modulating Gas Valve

## Venting Options and Installations



All indoor tankless units must be vented vertically or horizontally to the outdoors using manufacturer approved venting material. See the installation instructions for each specific model.

Venting details, including clearances and diagrams can be found in the "Use & Care Manual" of Rheem indoor tankless water heaters.

### Venting Options

- 1. ULC-S636 PVC & CPVC
- 2. ULC-S636 Concentric Vent
- 3. Standard Snorkel
- 4. Pancake Termination

## PRESTIGE™ HIGH-EFFICIENCY CONDENSING TANKLESS FROM RHEEM



For more information,  
call **1-866-720-2076**  
or visit **rheem.com**

---

*More Rheem water heaters have been installed in homes than any other brand. Rheem has been providing reliable water heating to the world since we invented the water heater over 100 years ago.*

---

### Premier Customer Experience *Priority One!*

Rheem Water Heating will be the premier customer experience provider of Rheem tankless water heaters. Rheem's philosophy of speed, accuracy and attentiveness will guide this initiative. This will be achieved through customer education, internal and external training, and after sales service.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

**Tankless** water heaters  
Continuous hot water



Rheem Water Heating and Heating & Cooling Products  
101 Bell Road • Montgomery, AL 36117-4305  
1-866-720-2076 • [www.rheem.com](http://www.rheem.com)

Rheem Canada Ltd./Ltée • Water Heater Division  
125 Edgeware Road, Unit 1, Brampton, Ontario L6Y 0P5

Printed in U.S.A. 08/11 WP TK-901C-CAN

*relax*  
It's Rheem®